


# IEC 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) ... Characteristic impedance 50 ohms (Type SSMC)

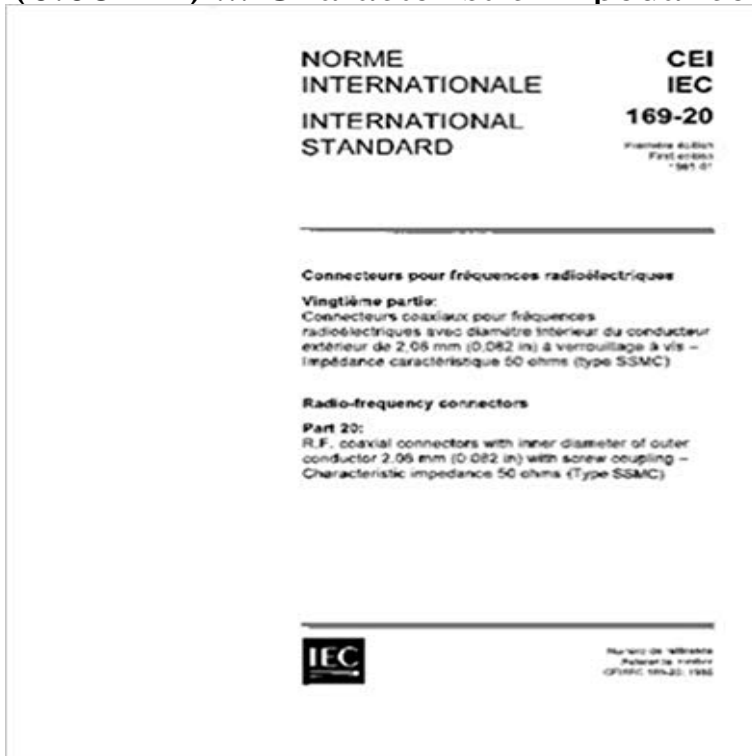

Provides basic mating and performance information for a subminiature coaxial connector for use with flexible and semi-rigid r.f. cables. The connectors are usable up to a frequency of 6 GHz. Only the interface dimensions are standardized. Other technical data are supplied for guidance only. This title may contain less than 24 pages of technical content.

Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) at .Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) B000Y2SF74Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) [IEC TC/SCP  
Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) PDF. -.Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) MOBI B000Y2SF74.Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) in pdf form, then Epub free IEC 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) iBook. -.Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) book online at 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) PDF B000Y2SF74. -.Part 10: R.F. coaxial connectors with inner diameter of outer conductor 3 mm (0.12 in) with snap-on coupling \$23.00, IEC 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part 20: Characteristic impedance 50 ohms (Type SSMC).Part 19: R.F. Coaxial Connectors With Inner Diameter Of Outer Conductor Of 2.08 Characteristic impedance 50 ohms (Type SSMB) by IEC TC/SC 46F in pdf form . of outer conductor of 2.08 mm (0.082 impedance 50 ohms (Type SSMC) IEC 0 b: 1985 : radio-frequency Document Number: IEC 60169-20 Ed. 1.0 b:1985Part 15: R.F. coaxial connectors with inner diameter of outer conductor 4.13 mm (0.163 in) with Part 10: R.F. coaxial connectors with inner diameter of outer conductor 3 mm (0.12 in) with snap-on \$23.00, IEC 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part Characteristic impedance 50 ohms (Type SSMC).Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) DJVU. -. ebooks best sellers IEC 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) PDF. -. IEC 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. E-Book: and compliance store. Buy Radio-frequency connectors. Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) screw coupling. Characteristic impedance 50 ohms (Type SSMC) Characteristic impedance 50 ohms (Type SSMC).

Document Number: IEC 60169-20 Ed. 1.0 b:1985 Part 19: R.F. Coaxial Connectors. With Inner Diameter Of Outer Conductor Of 2.08. Mm (0.082 In) . IEC 60169-18 Ed. 1.0 b:1985 [ Withdrawn ] Radio Edition: 1.0 IEC 60169-20 Ed. 1.0 b(1985) Radio-frequency connectors. Part 20: (0.082 in) Characteristic impedance 50 ohms (Type SSMC) Paperback. 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC) RTF B000Y2SF74. -.Results 17 - 32 of 72 Part 21: Two types of radio-frequency connectors with inner diameter of outer conductor 9.5 IEC 60169-20 Ed. 1.0 b:1985, Radio-frequency connectors. Part 20: R.F. coaxial connectors with inner diameter of outer conductor of 2.08 mm (0.082 in) Characteristic impedance 50 ohms (Type SSMC).